


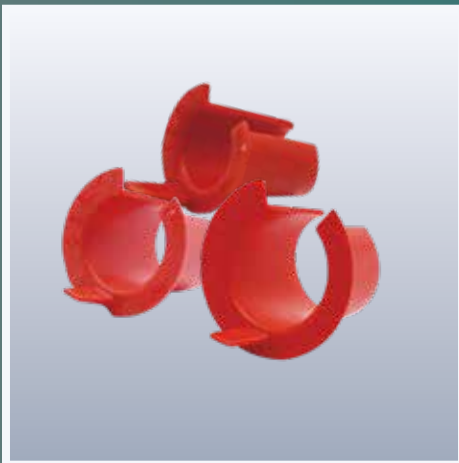

ELECTRICAL FITTINGS

Table of Contents

EMT CONDUIT FITTINGS	1-12
RMC CONDUIT FITTINGS	13-18
FLEXIBLE METAL CONDUIT FITTINGS	19-21
LIQUID TIGHT FLEXIBLE METAL CONDUIT FITTINGS	22
LIQUID TIGHT FLEXIBLE NON-METALLIC CONDUIT FITTINGS	23
ENT QUICK CONNECT ADAPTERS & COUPLINGS	24
CONNECTORS	25-26
CABLE CLAMPS	27

Plastic Insulating Bushing

- **Use:** These split, threaded insulating bushings are used on threaded rigid or IMC conduits when existing wires have already been pulled and an insulating bushing is required on the pipe.
- **Materials:** PVC
- **Certification:** UL/CSA



Cat. No.	Size
CPB-050	1/2"
CPB-075	3/4"
CPB-100	1"
CPB-125	1-1/4"
CPB-150	1-1/2"
CPB-200	2"
CPB-250	2-1/2"
CPB-300	3"
CPB-350	3-1/2"
CPB-400	4"

**For more details please contact sales@shlinsky.com*

EMT Insulating Bushing

- **Use:** Used to protect low voltage cables from damage caused by sharp edges on the end of EMT conduits. They may be used with many low voltage cables including coaxial, computer, telephone, category 5E, category 6, audio, video, fire alarm system, security system, and thermostat cables.
- **Materials:** PP
- **Certification:** UL/CSA




Cat. No.	Size
EPB-050	1/2"
EPB-075	3/4"
EPB-100	1"
EPB-125	1-1/4"
EPB-150	1-1/2"
EPB-200	2"
EPB-250	2-1/2"
EPB-300	3"
EPB-350	3-1/2"
EPB-400	4"



EMT Set Screw Connectors - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC111	1/2"	1.157	0.382	0.933	50	500
EC112	3/4"	1.378	0.366	1.169	25	250
EC113	1"	1.504	0.500	1.421	50	200
EC114	1-1/4"	1.969	1.535	1.823		25
EC115	1-1/2"	2.260	1.768	2.067		25
EC116	2"	2.563	2.228	2.524		20
EC117	2-1/2"	3.090	1.047	3.295		12
EC118	3"	3.374	1.059	3.909		12
EC119	3-1/2"	3.460	1.059	4.460		10
EC1110	4"	3.759	1.110	4.881		6

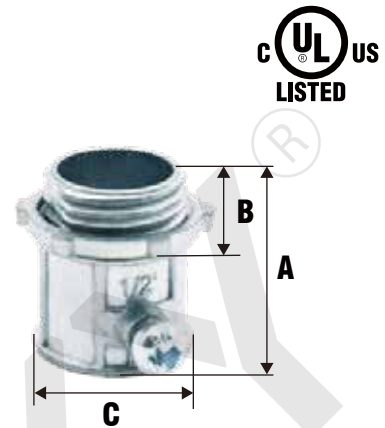

EMT Set Screw Connectors - Insulated Throat - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC121	1/2"	1.196	0.421	0.933	50	500
EC122	3/4"	1.417	0.405	1.169	25	250
EC123	1"	1.543	0.539	1.421	50	200
EC124	1-1/4"	2.008	1.574	1.823		25
EC125	1-1/2"	2.299	1.807	2.067		25
EC126	2"	2.602	2.267	2.524		20
EC127	2-1/2"	3.149	1.106	3.295		12
EC128	3"	3.433	1.118	3.909		12
EC129	3-1/2"	3.519	1.118	4.460		10
EC1210	4"	3.818	1.169	4.881		6



*For more details please contact sales@shlinsky.com


EMT Set Screw Couplings - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EK111	1/2"	1.488	0.905	50	500
EK112	3/4"	1.944	1.177	25	250
EK113	1"	2.275	1.413	50	200
EK114	1-1/4"	2.618	1.822		25
EK115	1-1/2"	2.909	2.039		25
EK116	2"	3.476	2.515		20
EK117	2-1/2"	4.011	3.303		12
EK118	3"	4.460	3.913		12
EK119	3-1/2"	4.850	4.520		10
EK1110	4"	5.248	4.909		6




EMT Set Screw Connectors - Steel

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC131	1/2"	1.314	0.407	0.848	50	500
EC132	3/4"	1.468	0.417	1.057	25	250
EC133	1"	1.685	0.492	1.338	50	200
EC134	1-1/4"	2.106	0.574	1.688		25
EC135	1-1/2"	2.283	0.633	1.929		25
EC136	2"	2.598	0.720	2.381		20
EC137	2-1/2"	3.299	0.720	3.161		12
EC138	3"	3.779	0.889	3.787		12
EC139	3-1/2"	3.921	0.889	4.283		10
EC1310	4"	4.039	0.889	4.803		6



EMT Set Screw Connectors - Insulated Throat - Steel


Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC141	1/2"	1.370	0.460	0.848	50	500
EC142	3/4"	1.535	0.488	1.057	25	250
EC143	1"	1.744	0.551	1.338	50	200
EC144	1-1/4"	2.185	0.653	1.688		25
EC145	1-1/2"	2.362	0.712	1.929		25
EC146	2"	2.677	0.799	2.381		20
EC147	2-1/2"	3.378	0.799	3.161		12
EC148	3"	3.858	0.799	3.787		12
EC149	3-1/2"	4.000	0.968	4.283		10
EC1410	4"	4.118	0.968	4.803		6



*For more details please contact sales@shlinsky.com


EMT Set Screw Couplings - Steel

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EK131	1/2"	1.582	0.848	50	500
EK132	3/4"	1.811	1.057	25	250
EK133	1"	2.047	1.338	50	200
EK134	1-1/4"	2.724	1.688		25
EK135	1-1/2"	3.007	1.929		25
EK136	2"	3.248	2.381		20
EK137	2-1/2"	4.094	3.161		12
EK138	3"	4.350	3.787		12
EK139	3-1/2"	4.574	4.283		10
EK1310	4"	4.724	4.803		6



EMT Compression Connectors - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC211	1/2"	1.256	0.965	0.433	50	500
EC212	3/4"	1.209	1.264	0.433	25	250
EC213	1"	1.575	1.516	0.547	50	200
EC214	1-1/4"	1.618	1.906	0.575		25
EC215	1-1/2"	1.874	2.276	0.622		25
EC216	2"	2.146	2.610	0.756		20
EC217	2-1/2"	2.610	3.311	1.004		12
EC218	3"	2.790	4.210	1.004		12
EC219	3-1/2"	2.770	5.060	0.940		10
EC2110	4"	2.839	5.350	1.087		6

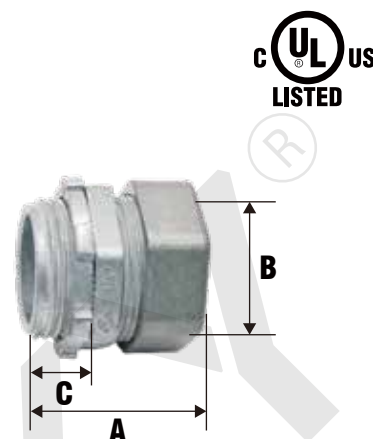

EMT Compression Connectors - Insulated Throat - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC221	1/2"	1.315	0.965	0.492	50	500
EC222	3/4"	1.268	1.264	0.492	25	250
EC223	1"	1.643	1.516	0.606	50	200
EC224	1-1/4"	1.697	1.906	0.654		25
EC225	1-1/2"	1.953	2.276	0.701		25
EC226	2"	2.225	2.610	0.835		20
EC227	2-1/2"	2.689	3.311	1.083		12
EC228	3"	2.869	4.210	1.083		12
EC229	3-1/2"	2.849	5.060	1.019		10
EC2210	4"	2.918	5.350	1.166		6



*For more details please contact sales@shlinsky.com


EMT Compression Couplings - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EK211	1/2"	1.531	0.965	50	500
EK212	3/4"	1.579	1.264	25	250
EK213	1"	1.870	1.516	50	200
EK214	1-1/4"	2.248	1.906		25
EK215	1-1/2"	3.181	2.276		25
EK216	2"	2.437	2.610		20
EK217	2-1/2"	3.362	3.311		12
EK218	3"	3.349	4.210		12
EK219	3-1/2"	3.510	5.060		10
EK2110	4"	3.573	5.350		6




EMT Compression Connectors - Steel

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC231	1/2"	1.709	0.417	1.079	50	500
EC232	3/4"	1.823	0.421	1.299	25	250
EC233	1"	2.059	0.449	1.543	50	200
EC234	1-1/4"	2.429	0.578	1.886		25
EC235	1-1/2"	2.736	0.591	2.106		25
EC236	2"	2.965	0.713	2.575		20
EC237	2-1/2"	3.724	0.795	3.406		12
EC238	3"	4.335	0.878	4.063		12
EC239	3-1/2"	4.303	0.858	4.543		10
EC2310	4"	4.543	0.909	5.059		6



EMT Compression Connectors - Insulated Throat - Steel

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC241	1/2"	1.749	0.457	1.079	50	500
EC242	3/4"	1.863	0.461	1.299	25	250
EC243	1"	2.099	0.489	1.543	50	200
EC244	1-1/4"	2.469	0.618	1.886		25
EC245	1-1/2"	2.776	0.631	2.106		25
EC246	2"	3.005	0.753	2.575		20
EC247	2-1/2"	3.764	0.835	3.406		12
EC248	3"	4.375	0.918	4.063		12
EC249	3-1/2"	4.343	0.898	4.543		10
EC2410	4"	4.583	0.949	5.059		6



*For more details please contact sales@shlinsky.com


EMT Compression Couplings - Steel

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EK231	1/2"	2.055	1.079	50	500
EK232	3/4"	2.185	1.299	25	250
EK233	1"	2.323	1.543	50	200
EK234	1-1/4"	2.854	1.886		25
EK235	1-1/2"	2.992	2.106		25
EK236	2"	2.913	2.575		20
EK237	2-1/2"	4.815	3.406		12
EK238	3"	5.220	4.063		12
EK239	3-1/2"	5.425	4.543		10
EK2310	4"	5.276	5.059		6




EMT Rain Tight Compression Connectors - Steel

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
RC231	1/2"	0.689	0.500	1.125	50	250
RC232	3/4"	0.750	0.500	1.375	25	200
RC233	1"	0.846	0.562	1.687		25
RC234	1-1/4"	1.687	1.012	2.062		25
RC235	1-1/2"	1.717	1.062	2.250		20
RC236	2"	1.875	1.125	2.750		20

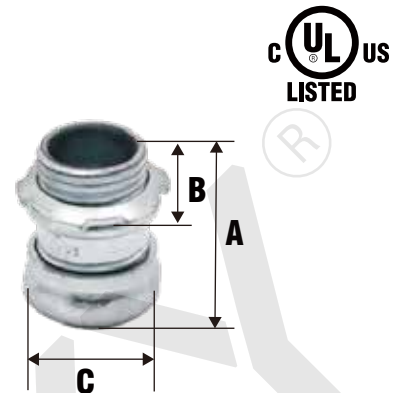

EMT Rain Tight Compression Connectors - Insulated Throat - Steel

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
RC241	1/2"	0.689	0.500	1.125	50	250
RC242	3/4"	0.750	0.500	1.375	25	200
RC243	1"	0.846	0.562	1.687		25
RC244	1-1/4"	1.687	1.012	2.062		25
RC245	1-1/2"	1.717	1.062	2.250		20
RC246	2"	1.875	1.125	2.750		20

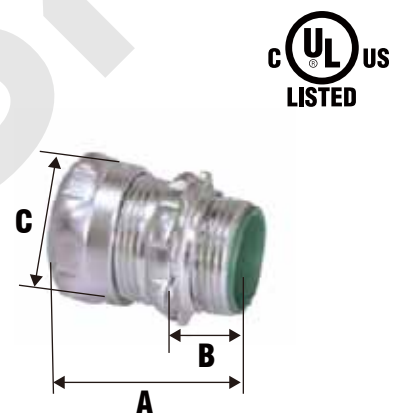

*For more details please contact sales@shlinsky.com

EMT Compression Rain Tight Couplings - Steel

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
RK231	1/2"	1.625	1.125	50	500
RK232	3/4"	1.750	1.375	25	250
RK233	1"	1.875	1.687	10	100
RK234	1-1/4"	2.250	2.062		25
RK235	1-1/2"	2.250	2.250		25
RK236	2"	2.375	2.750		20





- EMT conduit elbow is manufactured from prime EMT conduit in accordance with the latest specifications and standard of ANSI C80.3 (UL 797).
- The interior and exterior surfaces of elbows are free from defect with a smooth welded seam, and are thoroughly and evenly coated with zinc using hot dip galvanizing process, so that metal-to-metal contact and galvanic protection against corrosion are provided, and the surface of elbows adopt the clear post-galvanizing coating to provide further protection against corrosion.
- Elbows are produced in normal trade sizes from 1/2" to 6", the degrees including 90 deg, 60 deg, 45 deg, 30 deg, 22.5 deg, 15 deg or according to customer's request.
- The elbows are used to connect the EMT conduit to change the way of the EMT conduit.




**For more details please contact sales@shlinsky.com*





EMT 90° Elbows

Listed to Safety Standard UL 797
Manufactured in accordance with ANSI C80.3




Size	Min Radius "A"		Straight Length "C"		Offset "B"		Wt. Per 100 PCS		PCS/ Carton
	mm	in	mm	in	mm	in	kg	lbs	
EMT5090	102	4.02	43	1.67	145	5.69	10.8	24	50
EMT7590	114	4.49	55	2.17	169	6.65	19.7	43	50
EMT10090	146	5.75	60	2.36	206	8.11	35.1	77	20
EMT12590	184	7.24	70	2.76	254	10.00	64.3	142	20
EMT15090	210	8.27	80	3.15	290	11.42	84.8	187	10
EMT20090	241	9.49	90	3.54	331	13.03	123.4	272	10
EMT25090	267	10.51	120	4.72	387	15.24	211.8	467	50
EMT30090	330	12.99	135	5.32	465	18.31	310.8	685	35
EMT35090	381	15.00	155	6.10	536	21.10	471.4	1039	35
EMT40090	406	15.98	165	6.50	571	22.48	566.1	1248	25

REMARK: Elbows with special radius or special degree available upon request.

**For more details please contact sales@shlinsky.com*

EMT 45° Elbows

Listed to Safety Standard UL 797
Manufactured in accordance with ANSI C80.3

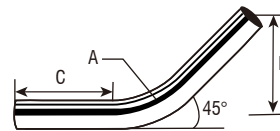


Size	Min Radius "A"		Straight Length "C"		Offset "B"		Wt. Per 100 PCS		PCS/ Carton
	mm	in	mm	in	mm	in	kg	lbs	
EMT5045	102	4.02	48	1.87	64	2.52	7.7	17	50
EMT7545	114	4.49	54	2.11	72	2.84	13.4	29	50
EMT10045	146	5.75	58	2.26	84	3.31	23.1	51	35
EMT12545	184	7.24	70	2.76	104	4.09	42.6	94	30
EMT15045	210	8.27	83	3.25	120	4.72	57.1	126	15
EMT20045	241	9.49	100	3.94	142	5.59	85.9	189	15
EMT25045	267	10.51	115	4.53	160	6.30	141.2	311	50
EMT30045	330	12.99	150	5.91	203	7.99	220.3	486	40
EMT35045	381	15.00	180	7.09	239	9.41	341.9	754	35
EMT40045	406	15.98	200	7.87	261	10.28	420.2	926	35

REMARK: Elbows with special radius or special degree available upon request.




EMT to BX or NM Cable Combination Set Screw Couplings - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EN111	1/2"	1.318	1.173	50	500

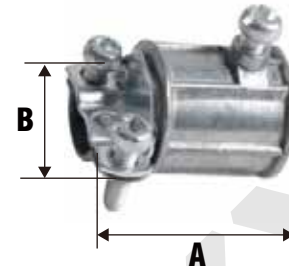

EMT to Flex Combination Coupling Squeeze Type - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EF111	1/2"	1.646	1.417	25	250
EF112	3/4"	1.972	1.547	25	250

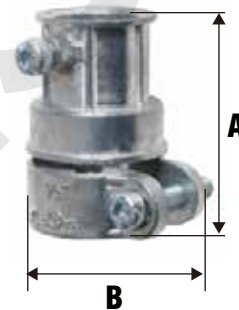

*For more details please contact sales@shlinsky.com

EMT to Flex Combination Couplings - Compression To Screw-in Type - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EF211	1/2"	1.681	0.976	0.630	50	500
EF212	3/4"	1.795	1.224	0.818	25	250
EF213	1"	2.190	1.514	1.000	25	250




EMT Pull Elbows - Inside Corner - Set Screw Type - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EE111	1/2"	2.295	0.933	10	100
EE112	3/4"	2.610	1.122	5	50



90° Compression Elbows - Zinc Die Cast


Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
EC311	1/2"	1.595	1.451	0.521		
EC312	3/4"	1.882	1.675	0.521		



*For more details please contact sales@shlinsky.com

EMT to EMT Pull Elbows - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EL111	1/2"	1.311	0.961	10	100
EL112	3/4"	1.385	1.230	5	50
EL113	1"	1.961	1.516		25
EL114	1-1/4"	2.303	1.890		20




EMT to Box Pull Elbows - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
EL211	1/2"	1.311	0.961	10	100
EL212	3/4"	1.385	1.230	5	50
EL213	1"	1.961	1.516		25
EL214	1-1/4"	2.303	1.890		20




EMT to Box Offset Set Screw Connector - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
E0111	1/2"	2.067	0.925	0.406		
E0112	3/4"	3.024	1.114	0.465		
E0112	1"	3.150	1.417	0.512		

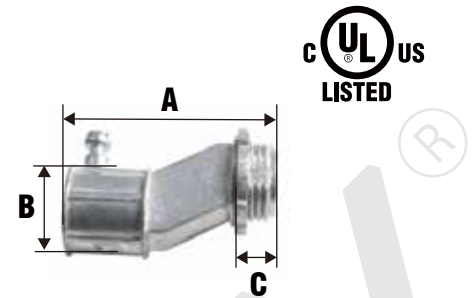


EMT to Box Offset Compression Connector - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
E0211	1/2"	2.130	1.000	0.406		
E0212	3/4"	2.900	1.190	0.465		

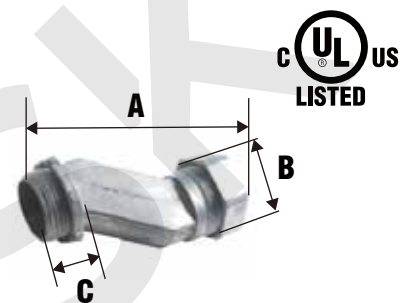


**For more details please contact sales@shlinsky.com*

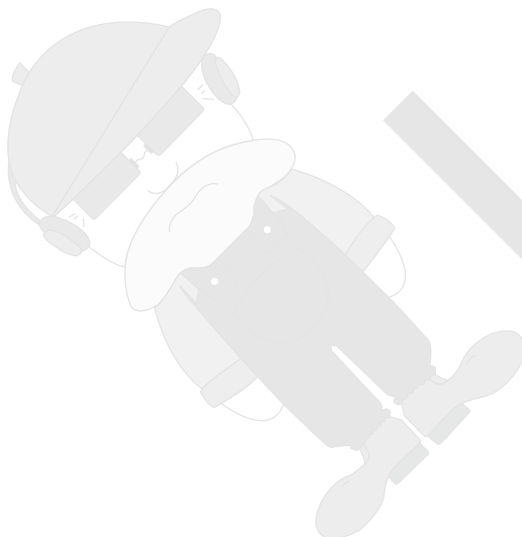

EMT Pipe Straps One Hole - Steel


Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
LOHS-38	3/8"	1.657	0.748	0.665	100	1000
LOHS-50	1/2"	1.657	0.571	0.665	100	1000
LOHS-75	3/4"	1.937	0.646	0.933	100	500
LOHS-100	1"	2.276	0.772	1.110	50	500
LOHS-125	1-1/4"	2.858	0.878	1.480	20	100
LOHS-150	1-1/2"	3.126	1.000	1.673		50
LOHS-200	2"	3.921	1.138	2.020		20
LOHS-250	2-1/2"	5.012	1.173	2.602		25
LOHS-300	3"	5.374	1.215	3.291		25
LOHS-350	3-1/2"	6.390	1.254	4.248		10
LOHS-400	4"	6.850	1.157	4.177		10

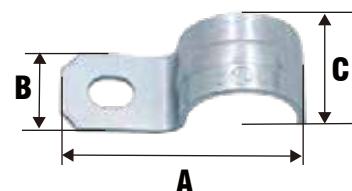

*For more details please contact sales@shlinsky.com

EMT Pipe Straps Two Hole - Steel

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
LWHS-50	1/2"	2.240	0.574	0.732	100	1000
LWHS-75	3/4"	2.756	0.636	0.965	100	500
LWHS-100	1"	3.252	0.713	1.157	50	500
LWHS-125	1-1/4"	3.831	0.748	1.453	20	100
LWHS-150	1-1/2"	4.323	0.791	1.957		50
LWHS-200	2"	4.925	1.004	2.205		20
LWHS-250	2-1/2"	6.106	1.004	2.969		25
LWHS-300	3"	6.772	1.004	3.539		25
LWHS-350	3-1/2"	7.425	1.004	4.110		10
LWHS-400	4"	9.366	1.016	4.508		10

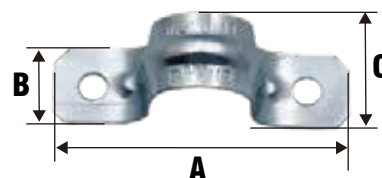

RIGID METAL CONDUIT(RMC) NIPPLES

USLINSKY®



- Rigid Conduit Nipple is manufactured from high-strength conduit shell in according with the latest specifications and standards of ANSI C80.1 (UL 6).
- The interior and exterior surfaces of nipples are free from defect with a smooth welded seam, and are thoroughly and evenly coated with zinc with hot dip galvanizing process, so that metal-to-metal contact and galvanic protection against corrosion are provided, the nipples with short length are electric plated and the longer length ones adopt the clear post-galvanizing coating to provide further protection against corrosion.
- Nipples are produced in normal trade sizes from 1/2" to 6", the lengths of the nipples including close nipples, 1-1/2", 2", 2-1/2", 3", 3-1/2", 4", 5", 6", 8", 10", 12" or according to customer's request.
- The nipples are used to connect the rigid steel conduit to extend the length of the conduit.

**For more details please contact sales@shlinsky.com*



Listed to Safety Standard UL 6
Manufactured in accordance with ANSI C80.1

Length	Close			1-1/2"		2"		2-1/2"		3"		3-1/2"	
Trade Size	Length	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100
1/2"	1-1/8"	600	6	600	8	600	12	400	15	400	19	300	22
3/4"	1-3/8"	400	9	400	9	300	14	300	19	200	24	200	28
1"	1-1/2"	300	16	-	-	200	22	200	28	150	36	150	43
1-1/4"	1-5/8"	150	22	-	-	150	28	150	37	100	47	100	55
1-1/2"	1-3/4"	100	28	-	-	75	34	75	44	50	56	50	68
2"	2"	75	44	-	-	-	-	50	59	50	72	40	88
2-1/2"	2-1/2"	40	84	-	-	-	-	-	-	40	100	30	120
3"	2-5/8"	30	118	-	-	-	-	-	-	20	130	15	157
3-1/2"	2-3/4"	20	160	-	-	-	-	-	-	-	-	-	-
4"	2-7/8"	20	180	-	-	-	-	-	-	-	-	-	-
5"	3"	5	240	-	-	-	-	-	-	-	-	-	-
6"	3-1/8"	5	350	-	-	-	-	-	-	-	-	-	-



RIGID METAL CONDUIT(RMC) NIPPLES

USLINSKY®


Listed to Safety Standard UL 6
Manufactured in accordance with ANSI C80.1



Length	4"		5"		6"		8"		10"		12"	
Trade Size	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100	Std. Ctn. Qty.	Lbs. Per 100
1/2"	300	26	200	33	200	40	100	54	75	68	75	82
3/4"	150	34	100	43	100	52	75	73	50	89	50	109
1"	100	49	100	64	75	78	50	109	50	138	50	166
1-1/4"	100	66	75	84	50	100	50	136	40	176	30	216
1-1/2"	50	80	50	103	50	122	40	170	30	216	20	260
2"	40	103	40	132	30	160	20	220	20	285	15	335
2-1/2"	30	150	20	197	20	240	10	329	10	422	10	505
3"	15	200	15	260	10	300	7	411	5	528	5	630
3-1/2"	10	240	8	320	8	373	7	510	4	655	4	785
4"	10	285	8	380	8	440	4	600	4	775	4	925
5"	-	-	5	480	5	600	4	825	3	1055	3	1260
6"	-	-	5	660	5	820	4	1125	3	1440	3	1720

REMARK: Nipples with longer than 12" length or with special threading requirements available upon request.

**For more details please contact sales@shlinsky.com*

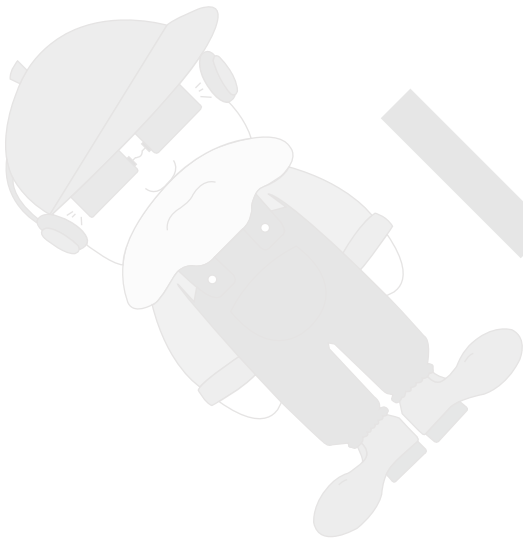


RIGID METAL CONDUIT(RMC) COUPLINGS

USLINSKY®




- The rigid conduit coupling is used to connect the electrical steel conduits together, thus extending the length of the conduit pipe. It is manufactured from seamless steel pipes according to ANSI C80.1 and UL 6 standards. Its trade size can be from 1/2" to 6". We can make the rigid conduit coupling zinc plate on both outer side and inner side.

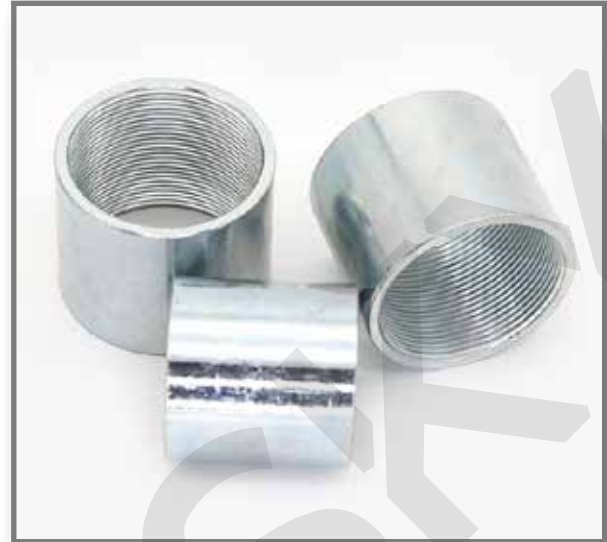

**For more details please contact sales@shlinsky.com*

Listed to Safety Standard UL 6
Manufactured in accordance with ANSI C80.1



Trade Size	Wt. Per 100 PCS		Outside Diameter "B"		Minimum Acceptable Length "A"		Std. Ctn. Qty.	Wt. Per Carton	
	kg	lbs	mm	in	mm	in		kg	lbs
1/2"	6.35	14	25.7	1.01	41.3	1.63	400	25.4	56
3/4"	9.07	20	31.8	1.25	41.7	1.64	300	27.2	60
1"	14.06	31	38.7	1.53	50.0	1.97	180	25.3	56
1-1/4"	17.69	39	47.5	1.87	51.6	2.03	100	17.7	39
1-1/2"	25.40	56	54.7	2.16	52.4	2.06	75	19.1	42
2"	33.11	73	67.3	2.65	54.0	2.13	60	19.9	44
2-1/2"	83.92	185	82.6	3.25	81.0	3.19	12	10.1	22
3"	102.51	226	98.3	3.87	84.1	3.31	8	8.2	18
3-1/2"	162.39	358	114.3	4.50	86.5	3.41	4	6.5	14
4"	181.44	400	123.8	4.88	89.3	3.52	4	7.3	16
5"	225.44	497	152.4	6.00	100.4	3.95	2	4.5	10
6"	370.10	816	182.9	7.20	108.0	4.25	3	11.1	24



RIGID METAL CONDUIT(RMC) ELBOWS

USLINSKY®



- Rigid steel conduit elbow is manufactured from prime conduit shell with high-strength in accordance with the latest specifications and standard of ANSI C80.1(UL 6).
- The interior and exterior surfaces of elbows are free from defect with a smooth welded seam, and are thoroughly and evenly coated with zinc using hot dip galvanizing process, so that metal-to-metal contact and galvanic protection against corrosion are provided, and the surface of elbows adopt the clear post-galvanizing coating to provide further protection against corrosion.
- Elbows are produced in normal trade sizes from 1/2" to 6", the degrees including 90 deg, 60 deg, 45 deg, 30 deg, 22.5 deg, 15 deg or according to customer's request.
- Elbows are threaded on both ends, a thread protector with industry color-coded by sizes from 3" to 6" applied.
- The elbows are used to connect the rigid steel conduit to change the way of the conduit.



**For more details please contact sales@shlinsky.com*



RIGID METAL CONDUIT(RMC) ELBOWS


USLINSKY®



Rigid 90° Elbows

Listed to Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Size	Min Radius "A"		Straight Length "C"		Offset "B"		Wt. Per 100 PCS		PCS/ Carton
	mm	in	mm	in	mm	in	kg	lbs	
1/2"	102	4.02	43	1.67	145	5.69	29.9	66	50
3/4"	114	4.49	55	2.17	169	6.65	47.0	104	50
1"	146	5.75	60	2.36	206	8.11	83.8	185	20
1-1/4"	184	7.24	70	2.76	254	10.00	139.4	307	20
1-1/2"	210	8.27	80	3.15	290	11.42	191.2	421	10
2"	241	9.49	90	3.54	331	13.03	291.9	644	10
2-1/2"	267	10.51	120	4.72	387	15.24	549.6	1212	50
3"	330	12.99	135	5.32	465	18.31	854.8	1884	35
3-1/2"	381	15.00	155	6.10	536	21.10	1190.5	2624	35
4"	406	15.98	165	6.50	571	22.48	1485.2	3274	25
5"	610	24.01	283	11.14	893	35.16	3173.8	6997	BULK
6"	762	30.00	337	13.27	1099	43.27	5119.5	11286	BULK


REMARK: Elbows with special radius or special degree available upon request.

*For more details please contact sales@shlinsky.com

Rigid 45° Elbows

Listed to Safety Standard UL 6

Manufactured in accordance with ANSI C80.1

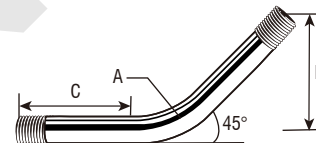

Size	Min Radius "A"		Straight Length "C"		Offset "B"		Wt. Per 100 PCS		PCS/ Carton
	mm	in	mm	in	mm	in	kg	lbs	
1/2"	102	4.02	48	1.87	64	2.52	21.3	47	50
3/4"	114	4.49	54	2.11	72	2.84	31.9	70	50
1"	146	5.75	58	2.26	84	3.31	55.0	121	35
1-1/4"	184	7.24	70	2.76	104	4.09	92.4	204	30
1-1/2"	210	8.27	83	3.25	120	4.72	128.8	284	15
2"	241	9.49	100	3.94	142	5.59	203.3	448	15
2-1/2"	267	10.51	115	4.53	160	6.30	366.4	808	50
3"	330	12.99	150	5.91	203	7.99	605.9	1336	40
3-1/2"	381	15.00	180	7.09	239	9.41	863.4	1903	35
4"	406	15.98	200	7.87	261	10.28	1102.4	2430	35
5"	610	24.01	281	11.06	377	14.84	2167.0	4777	BULK
6"	762	30.00	323	12.72	452	17.80	3406.2	7509	BULK

REMARK: Elbows with special radius or special degree available upon request.



Threaded & Socket Terminal Adapter


Cat. No.	Trade Size	Dimensions(in)			Std.Ctn.
		A	B	C	
40PVC-50 (PVC30)	1/2"	0.852	1-1/8	0.597	150
40PVC-75 (PVC31)	3/4"	1.064	11-1/32	0.800	125
40PVC-100 (PVC32)	1"	1.330	1-5/8	1.018	50
40PVC-125 (PVC33)	1-1/4"	1.677	21/32	1.332	50
40PVC-150 (PVC34)	1-1/2"	1.918	25/32	1.566	25
40PVC-200 (PVC35)	2"	2.393	2-21/32	2.000	50



*For more details please contact sales@shlinsky.com

Standard couplings

Cat. No.	Trade Size	Dimensions(in)			Std.Ctn.
		A	B	C	
40PVC-50 (PVC10)	1/2"	0.852	1-7/64	1-1/2	150
40PVC-75 (PVC11)	3/4"	1.064	1-5/16	1-5/8	100
40PVC-100 (PVC12)	1"	1.330	1-5/8	2	50
40PVC-125 (PVC13)	1-1/4"	1.677	1-63/64	2-1/8	30
40PVC-150 (PVC14)	1-1/2"	1.918	2-15/64	2-3/8	25
40PVC-200 (PVC15)	2"	2.393	2-47/64	2-1/2	30
40PVC-250 (PC-250)	2-1/2"	2.890	3-5/16	3-3/16	20
40PVC-300 (PC-300)	3"	3.515	3-31/32	3-13/32	25

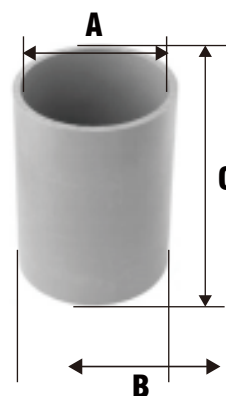

ENT Connector

Cat. No.	Trade Size	Dimensions(in)		Carton Qty.
		A	B	
KTA-10	1/2"			150
KTA-15	3/4"			100



Female Adapter


Cat. No.	Trade Size	Dimensions(in)			Carton Qty.
		A	B	C	
40PVC-50 (PVC20)	1/2"	1.000	0.688	1.438	200
40PVC-75 (PVC21)	3/4"	1.250	0.688	1.625	125
40PVC-100 (PVC22)	1"	1.563	0.875	1.875	70
40PVC-125 (PVC23)	1-1/4"	2.000	0.938	1.938	40
40PVC-150 (PVC24)	1-1/2"	2.250	0.938	2.125	30
40PVC-200 (PVC25)	2"	2.688	0.938	2.125	40



*For more details please contact sales@shlinsky.com


PVC Bushing

Cat. No.	Trade Size	Dimensions(in)		Carton Qty.
		A	B	
ECP50 (AICPB050)	1/2"	1.03	0.37	1000
ECP75 (AICPB075)	3/4"	1.28	0.39	1000
ECP100 (AICPB100)	1"	1.65	0.50	500
ECP125 (AICPB125)	1-1/4"	2.10	0.49	250
ECP150 (AICPB150)	1-1/2"	2.28	0.49	250
ECP200 (AICPB200)	2"	2.66	0.54	100
ECP250 (AICPB250)	2-1/2"	3.31	0.63	25
EC300 (AICPB300)	3"	3.95	0.70	25
ECP350 (AICPB350)	3-1/2"	4.41	0.71	25
ECP400 (AICPB400)	4"	4.94	0.73	25

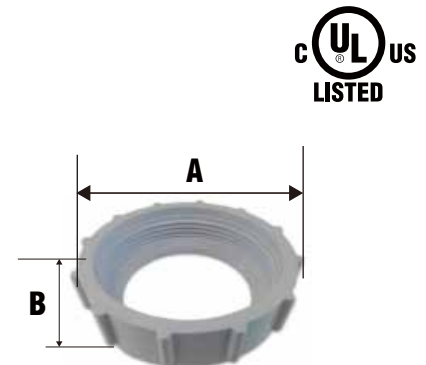

2-Hole Pipe Strap


Cat. No.	Trade Size	Dimensions(in)			Carton Qty.
		A	B	C	
THSPVC-50 (AIPS050)	1/2"	3/4	4-1/8	2-7/8	
THSPVC-75 (AIPS075)	3/4"	15/16	4-5/16	3-1/16	
THSPVC-100 (AIPS100)	1"	1-1/8	4-11/16	3-3/8	
THSPVC-125 (AIPS125)	1-1/4"	1-1/2	4-15/16	3-11/16	
THSPVC-150 (AIPS150)	1-1/2"	1-5/8	5-9/16	4-1/4	
THSPVC-200 (AIPS200)	2"	2-1/4	5-3/4	4-1/2	
THSPVC-250 (AIPS250)	2-1/2"	2-3/4	6-1/4	5	
THSPVC-300 (AIPS300)	3"	3-7/8	7-1/8	5-7/8	

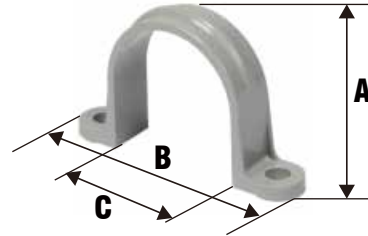

*For more details please contact sales@shlinsky.com


SCH40 45 DGR Belled

Cat. No.	Trade Size	Dimensions(in)			Carton Qty.
		A	B	C	
40PVC5045	1/2"	1.000	3.125	1.500	50
40PVC7545	3/4"	1.500	3.500	1.500	25
40PVC10045	1"	1.500	4.500	1.875	20
40PVC12545	1-1/4"	1.500	5.688	2.000	25
40PVC15045	1-1/2"	2.000	6.500	2.000	25
40PVC20045	2"	2.000	7.500	2.000	10
40PVC25045	2-1/2"	2.250	8.250	3.000	20
40PVC30045	3"	2.500	10.188	3.500	8

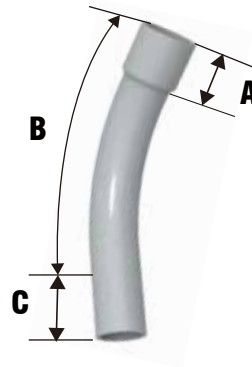

SCH40 90 DGR Belled

Cat. No.	Trade Size	Dimensions(in)			Carton Qty.
		A	B	C	
40PVC5090	1/2"	1.000	6.250	1.500	50
40PVC7590	3/4"	1.500	7.125	1.500	35
40PVC10090	1"	1.500	9.000	1.875	20
40PVC12590	1-1/4"	1.500	11.375	2.000	30
40PVC15090	1-1/2"	2.000	13.000	2.000	30
40PVC20090	2"	2.000	15.000	2.000	15
40PVC25090	2-1/2"	2.250	16.500	3.000	18
40PVC30090	3"	2.500	20.375	3.125	14

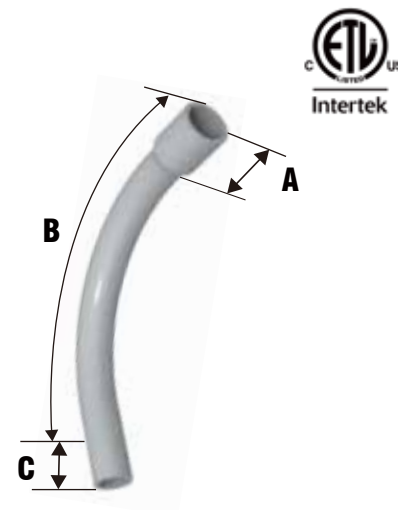

**For more details please contact sales@shlinsky.com*



Rigid Box Spacers - Zinc Die Cast


Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
BS011	1/2"	1.118	0.905	50	500
BS012	3/4"	1.118	1.177	25	250



*For more details please contact sales@shlinsky.com


Rigid Water Tight Hubs - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
RWH15	1/2"	1.406	1.406	25	100
RWH20	3/4"	1.539	1.661	25	100
RWH25	1"	1.752	1.949	10	50
RWH50	2"	1.831	3.201	5	25



Flexible Metal Conduit Squeeze Connectors - Zinc Die Cast


Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
XC011	1/2"	1.437	0.492	1.370	25	250
XC012	3/4"	1.575	0.476	1.574	25	250
XC013	1"	1.760	0.571	1.866	10	100
XC014	1-1/4"	1.874	0.587	2.145	10	100
XC015	1-1/2"	2.008	0.610	2.519	5	50



**For more details please contact sales@shlinsky.com*


Flexible Metal Conduit Squeeze Connectors - Insulated Throat - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
XC011 带皮圈	1/2"	1.497	0.552	1.370	25	250
XC012 带皮圈	3/4"	1.635	0.536	1.574	25	250
XC013 带皮圈	1"	1.820	0.631	1.866	10	100
XC014 带皮圈	1-1/4"	1.954	0.667	2.145	10	100
XC015 带皮圈	1-1/2"	2.934	0.690	2.519	5	50




Duplex Connector - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
XC311	3/8"	1.591	1.622	0.457	25	250



Flex Connectors - Screw In - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
XC410	3/8"	1.303	0.906	50	500
XC411	1/2"	1.366	0.913	50	500
XC412	3/4"	1.614	1.126	25	250
XC413	1"	1.925	1.366	25	250
XC414	1-1/4"	2.142	1.744	10	100
XC415	1-1/2"	2.413	2.098	10	40
XC416	2"	2.559	2.650	10	40

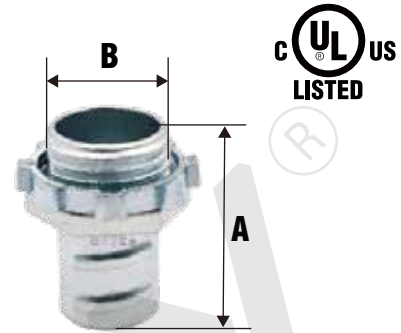

*For more details please contact sales@shlinsky.com

Flexible Metal Conduit 90° Squeeze Connectors - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
XC910	3/8"	1.752	0.350	50	500
XC911	1/2"	2.122	0.350	25	250
XC912	3/4"	2.346	0.440	10	100
XC913	1"	2.768	0.543	5	25
XC914	1-1/4"	3.890	0.594	1	10
XC915	1-1/2"	6.008	0.689	1	10
XC916	2"	6.008	0.701		1
XC917	2-1/2"	6.795	0.843		1
XC918	3"	7.886	0.827		1
XC919	3-1/2"	9.400	0.941		1
XC9110	4"	9.783	0.941		1



Bx Flex Connector - Set Screw Type - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
XC1105	1/2"	1.496	0.42	1.182	25	250




FLEXIBLE METAL CONDUIT FITTINGS

USLINSKY®


Set Screw Bx Connectors - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
XC1100	3/8"	0.780	0.877	0.386	100	1000

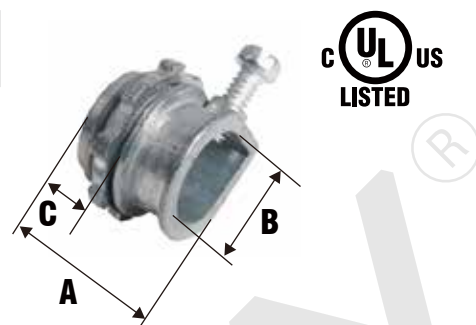

Cable Connectors Steel Clamp - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)		Inner Box	Outer Box
		A	B		
NC390	3/8"	0.783	0.354	100	1000
NC391	1/2"	0.846	0.394	50	500
NC392	3/4"	0.925	0.409	50	500
NC393	1"	1.086	0.503	25	250
NC394	1-1/4"	1.251	0.598	10	100
NC395	1-1/2"	1.440	0.606	5	50
NC396	2"	1.577	0.769	10	40

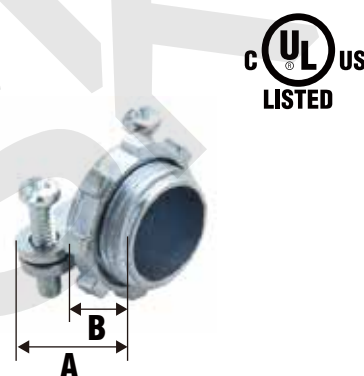

*For more details please contact sales@shlinsky.com

Anti-Short Bushings

Applications


Indoor use only
Fits cable range: 14/2, 14/3, 12/2
Insert one bushing at each end of conduit to protect wire

Standard Material

Polyethylene




Cat. No.	Trade Size	Dimensions(in)		Cable Izes	Std Pkg
		A	B		
ASB#0	5/16"	0.568	0.652	14/2, 14/3, 12/2	100/BAG
ASB#1	3/8"	0.625	0.655	14/4, 12/3, 6/1, 4/1	100/BAG
ASB#2	7/16"	0.605	0.840	12/4, 10/2, 10/3, 2/1	50/BAG
ASB#3	1/2"	0.675	1.020	10/4, 8/2, 8/3, 1/1	50/BAG
ASB#4	3/4"	0.815	1.250	8/4, 6/2, 6/3, 6/4, 4/2, 4/3	50/BAG

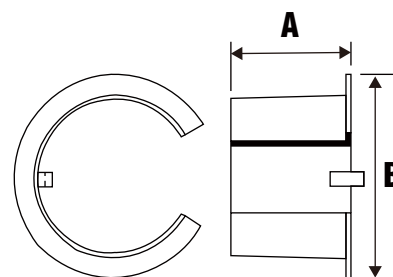


Liquid Tight Connectors - Straight with Insulated Throat - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
S501	3/8"	1.484	1.299	0.583	20	200
S502	1/2"	1.484	1.307	0.591	20	200
S503	3/4"	1.488	1.583	0.591	10	100
S504	1"	1.850	1.780	0.756	5	50
S505	1-1/4"	2.071	1.909	0.756	5	50
S506	1-1/2"	2.031	2.488	0.756	2	20
S507	2"	2.047	2.992	0.724	2	20

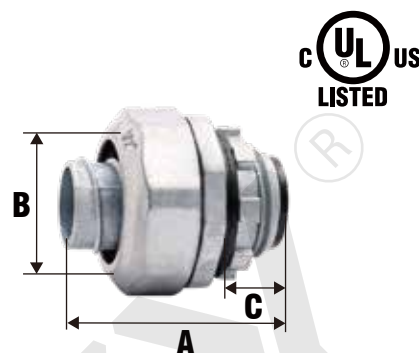

Liquid Tight Connectors - 90° Elbow with Insulated Throat - Zinc Die Cast

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
S531	3/8"	2.402	2.244	0.551	10	100
S532	1/2"	2.433	2.193	0.551	10	100
S533	3/4"	2.717	2.559	0.603	10	100
S534	1"	3.425	2.925	0.760	5	50
S535	1-1/4"	3.976	3.260	0.878	2	20
S536	1-1/2"	4.122	3.740	0.748	2	20
S537	2"	4.701	4.224	0.720	1	10

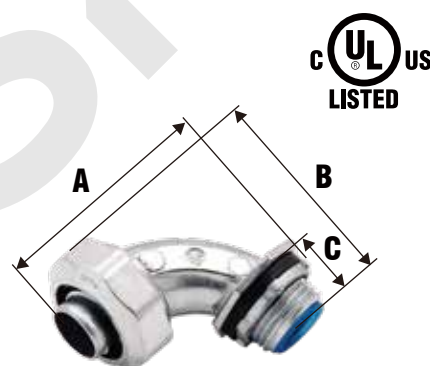


**For more details please contact sales@shlinsky.com*




Liquid Tight Connectors - Straight

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
PP601	3/8"	1.180	0.550	1.420	20	200
PP602	1/2"	1.180	0.550	1.420	20	200
PP603	3/4"	1.200	0.640	1.690	10	100
PP604	1"	1.230	0.720	2.020	5	50
PP605	1-1/4"	2.440	0.760	2.400	5	50
PP606	1-1/2"	2.700	0.800	2.670	2	20
PP607	2"	2.990	0.850	3.280	2	20




Liquid Tight Connectors - 90° Elbow

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
PP631	3/8"	2.840	0.500	2.030	10	100
PP632	1/2"	2.840	0.500	2.030	10	100
PP633	3/4"	3.250	0.500	2.330	10	100
PP634	1"	3.540	0.600	2.950	5	50
PP635	1-1/4"	4.750	0.760	5.200	2	20
PP636	1-1/2"	4.750	0.800	5.200	2	20
PP637	2"	5.420	0.860	5.800	1	10

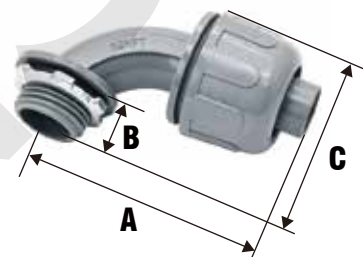

*For more details please contact sales@shlinsky.com

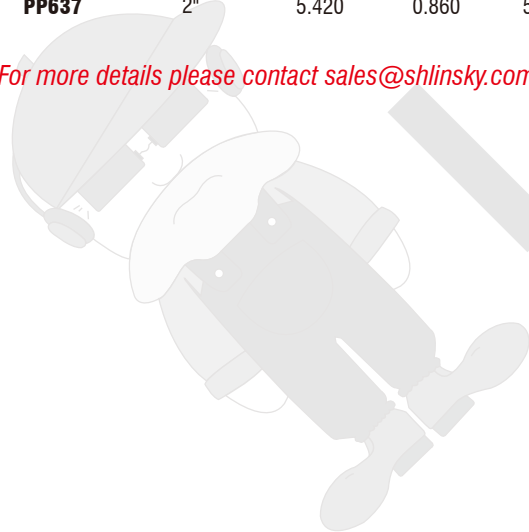


Features and Benefits:

- One piece ENT Quick Connect Couplings, Threaded Adapters and Snap-In Terminator Adapters are suitable for damp locations. Quick Connect Couplings and Threaded Adapters are concrete-tight when used with ENT.
- All Schedule 40 fittings are compatible with ENT when using ENT cement.
- Schedule 40 fittings are recommended for use with 1-1/4" – 2" Blue Electrical Nonmetallic Tubing Conduit.
- Use of ENT Blue Quick-Set Cement is required.
- When One Piece Quick Connect Snap-In Terminator Adapters are installed in a concrete application, flat sealing washers must be used on the box connection ends.

**For more details please contact sales@shlinsky.com*


Couplings

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
CP50	1/2"	1.59	1.03	1.13		150
CP75	3/4"	1.86	1.25	1.35		100
CP100	1"	1.86	1.52	1.62		50

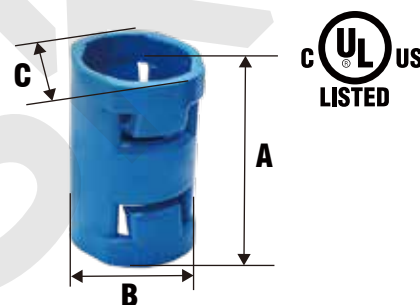


Threaded Adapters

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
TA50	1/2"	1.41	1.03	1.13		150
TA75	3/4"	1.54	1.25	1.35		100
TA100	1"	1.67	1.52	1.62		50

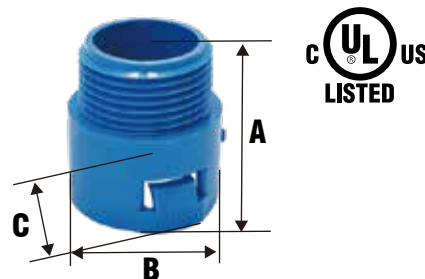

Snap-In Adapters

Cat. No.	Trade Size	Dimensions(in)			Inner Box	Outer Box
		A	B	C		
SA50	1/2"	1.41	1.03	1.13		150
SA75	3/4"	1.54	1.25	1.35		100
SA100	1"	1.67	1.52	1.62		50

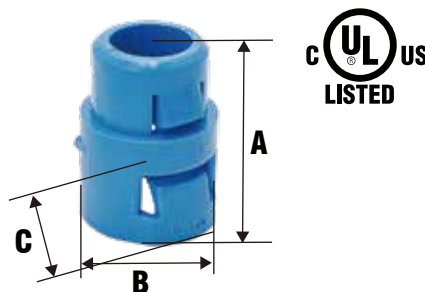

SCREW-ON WIRE CONNECTORS

USLINSKY®

- **Housing**

Thermoplastic engineering materials, UL 94V-2, 94V-0, good insulation properties, anti-aging.

- **Spring**

Galvanized carbon steel spring.

- **Characteristic**



After stripping the wire, insert it into the connector, rotate the connector, the spring tightens the wire. Can replace Traditional wiring method which using insulating tape rotating it.

- **Certificate**

UL, ROHS certificated

- **Applications**

widely-used in all kinds of electrical products, lighting and home wiring equipment, reusable and safety.

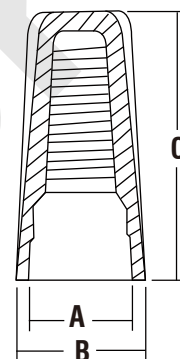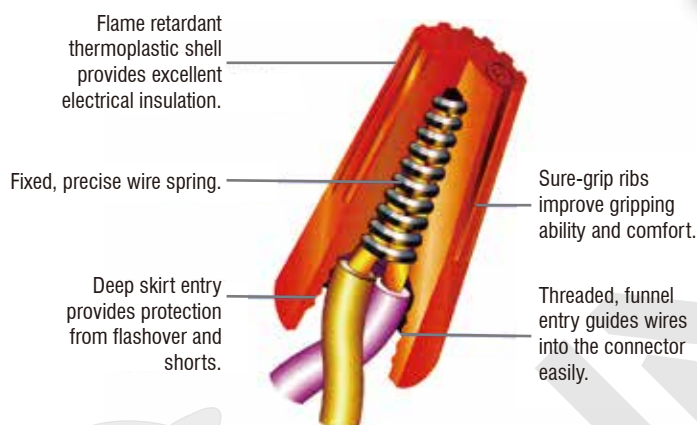

**For more details please contact sales@shlinsky.com*

Cat. No.	Color	Wire Range	Electrical Ratings	Dimensions (mm)			Packing
				A	B	C	
P1	Gray	22-14AWG Max.2#16 w/2#18 w/2#20 Min.2#22	Voltage: 300 Volt Max. Temperature: 105°C (221°F)	6.7	8.6	15.2	1000 Pcs/Bag 20000 Pcs/Ctn
P2	Blue	22-14AWG Max.2#14 w/2#16 w/2#18 w/2#20 Min.2#22	Voltage: 300 Volt Max. Temperature: 105°C (221°F)	7.4	9.8	17.6	1000 Pcs/Bag 10000 Pcs/Ctn
P3	Orange	22-14AWG Max.2#14 w/2#16 w/2#18 w/2#20 Min.2#22	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	9.9	12	22	500 Pcs/Bag 5000 Pcs/Ctn
P4	Yellow	22-10AWG Max.2#12 w/2#14 w/2#16 Min.2#18	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	11	14	24.5	500 Pcs/Bag 5000 Pcs/Ctn
P6	Red	22-10AWG Max.2#10 w/2#12 w/2#14 Min.2#16	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	13	16.4	26.5	500 Pcs/Bag 5000 Pcs/Ctn



WINGED WIRE CONNECTORS

6 colors suggest different models


- General line diameter combination from 22 to 16AWG
- Contain square section spring design, can clamp the wire, not easy to loose
- Do not need to twist the wire in advance, the wire can be screwed in
- The long insulation design can prevent inductive electricity and reduce the accident of short circuit caused by wire rewinding
- Durable insulated housing meets the flame resistance rating of UL 94V-2, applicable temperature up to 105°C (221°F)
- Complies with UL Listed 486C product specifications and USA Federal W-S-610E specification.
- Material: UL approved PP material, Spring
Color: Yellow / Ivory / Red / Grey / Blue / Green
- Temperature: to 105°C (221°F)



Flame retardant thermoplastic shell provides excellent electrical insulation.


Swept-back wing design fit into your fingers naturally and provides finger-tip comfort which allow for increased torquing power.

Square spots on the surface of connector provide more grasp and reduce slip through your fingers.

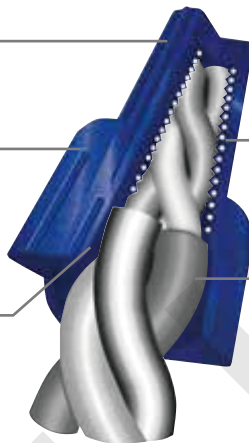

Square wire spring provides more securely gripping on conductors.

Deep skirt entry provides protection from flashover and shorts.

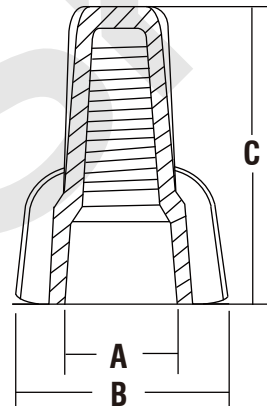

**For more details please contact sales@shlinsky.com*

Cat. No.	Color	Wire Range	Electrical Ratings	Dimensions (mm)			Packing
				A	B	C	
P11	Yellow	18-10AWG Max.2#12 w/2#14 w/2#26 Min.2#18	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	10	18	25.4	500 Pcs/Bag 5000 Pcs/Ctn
P12	Ivory	18-8AWG Max.2#10 w/2#12 w/2#14 w/2#16 Min.2#18	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	10	17.8	27.7	500 Pcs/Bag 5000 Pcs/Ctn
P13	Red	18-8AWG Max.2#8 w/2#10 w/2#12 w/2#14 w/2#16 Min.2#18	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	12	23.1	30.5	500 Pcs/Bag 4000 Pcs/Ctn
P15	Gray	18-10AWG Max.2#10 w/2#12 Min.2#14	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	14.6	25.5	32.6	500Pcs/Bag 3000 Pcs/Ctn
P17	Blue	12-8AWG Max.2#8 w/2#10 Min.2#12	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	17.8	31.7	39.5	500 Pcs/Bag 2000 Pcs/Ctn
P19	Green	14-10AWG Max.2#10 w/2#12 Min.2#14	Voltage: 600 Volt Max. Temperature: 105°C (221°F)	12.1	20.2	28.8	500 Pcs/Bag 3000 Pcs/Ctn



CABLE CLAMPS

USLINSKY®



RCR50



RCR75




Cat. No.	Description	STD. CTN. QTY.
RCR50	1/2" Cable Clamp	1200pcs
RCR75	3/4" Cable Clamp	1200pcs

*For more details please contact sales@shlinsky.com

Cable Stackers

Designed for fast & easy multi-cable installations

- Cable Stackers are used to route, fasten, and support NM, CATV, telephone, security and instrumentation cables
- Cable Stackers organize lengthy cable runs, eliminating tangled wires and excessive heating that can occur when too many cables are fastened tightly together
- The angled nail allows it to be installed from any direction, regardless of the spacing or positioning of the studs

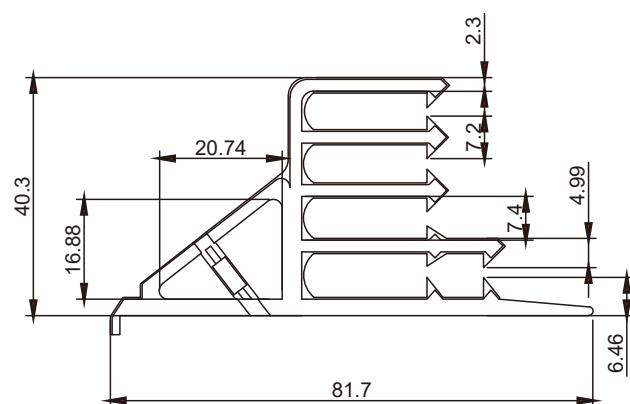

Wire Range / Capacity	
Quantity	Size
1-6	14-2 AWG
1-6	12-2 AWG
1-6	10-2 AWG
1-6	14-3 AWG
1-6	12-3 AWG
1-6	10-3 AWG
UF or NM Cable - Round	
1-6	14-2 AWG
1-6	14-3 AWG
1-6	12-2 AWG
1-6	12-3 AWG
Telephone, Signal Cables, etc.	
1-12	RG-59
1-12	RG-8
1-14	Cat5



Metal Stud Grommets

- Material/Finish:
Plastic
- Application:
These metal-stud grommets are used to protect wires from damage that can be caused by sharp edges on metal studs. They also help reduce vibratory ratting of metallic conduits.
- Color: Yellow,White



Cat. No.	Description	STD. Pkg.
1 MBB	Metal stud grommet for 1" trade size hole	100pcs

**For more details please contact sales@shlinsky.com*

Cable Connectors with End Stop Bushings



3/4 PJPB



1/2 PJPB

Cat. No.	Description	QTY.
3/4 PJPB	3/4" Thread Installation Fitting	500pcs
1/2 PJPB	1/2" Thread Installation Fitting	500pcs

Non-Metallic Snap In Blanks



NT 1/2"



NT 3/4"

Cat. No.	Description	QTY.
1/2 PJPB		500pcs
3/4 PJPB		500pcs



USLINSKY®

SHANGHAI LINSKY ELECTRICAL CO.,LTD

 **+86-21-67107908**

 **sales@linsky.cn**

 **www.shlinsky.com**

 **Office Add: Room 1002, #2 Building, Phoenix Creativity Valley, Lane
1588 Huhang Highway, Fengxian District, Shanghai, China
Shanghai Factory Add: No.29 Lane 1888 Daye Highway, Fengxian
District, Shanghai, China
Cambodia Factory Add: Santepheap Village, Taing Krouch Commune,
Samrong Torng District, Kampong Speu Province, Cambodia**