



AMERICAN PLASTIC BOX

MODEL NUMBER	APB2GN
CUBIC CAPACITY	N/A
DESCRIPTION	New Work; 2-Gang; Low Voltage Bracket With Nail; 3/4", 1", 1-1/4" Resi-Rings. Captive Angled Nails or Bracket Mounting.
MATERIAL	PPO
MOUNTING MEANS	Captive Nails and Bracket Support
PRODUCTS SIZE L×W×D	4.07"×3.77"×3.15"
OUTER BOX SIZE L×W×D(CM)	
STD. CTN. QTY.	
CERTIFICATIONS	ISO9001, ISO14001, ETL5010519, 2-hour fire rating
COLOR	Various Colors Can Be Customised

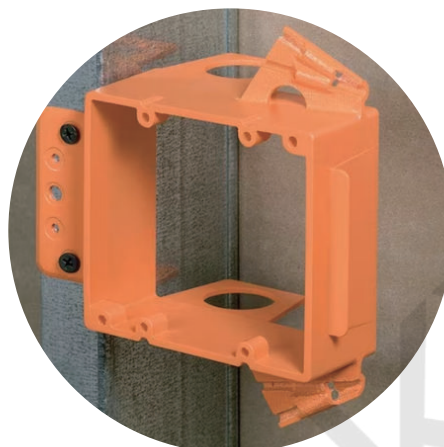

Various Colors Can Be Customised

FEATURES & BENEFITS

- Designed and listed for use with non-metallic sheathed cable in accordance with Article 314 of the National Electrical Code®, they make fast work of any residential or light commercial application.
- Non-metallic boxes feature PPO construction for easier installation, greater performance and lower installation cost.
- All PPO boxes are permissible for use with 90° C connectors.
- Wiring System Non-metallic sheathed cable.
- Various Colors Can Be Customised.
- ETL Listed and carries a 2-hour fire rating.

